

VisionArt[®]

PRE-CONSTRUCTION BACK BOX
WITH VA-ICS
INSTALLATION INSTRUCTIONS

PRE-CONSTRUCTION BACK BOX PACKING LIST



(1) ICS- INTERNAL COOLING SYSTEM

(1) TEMPERATURE SENSOR

L-BRACKETS **

(4) for PREMIERE GALLERIE UNITS

(2) for DÉCOR GALLERIE UNITS

1-1/2" HEX SCREWS

(8) for PREMIERE GALLERIE

(4) for DÉCOR GALLERIE

****IF YOU DID NOT SPECIFY THE GALLERIE OF YOUR VISION ART,
YOUR BRACKETS WILL NOT BE FACTORY ATTACHED**

TO THE BACK BOX.

STEP 1:

Remove screws and pre drill holes in metal back box at factory installed bracket locations. SEE IMAGE #1.



STEP 2:

Place pre construction box in recess. SEE IMAGES #2 & 3



STEP 3:

Using provided hex screws, attach brackets to the sides of the recess cavity by drilling through the preconstruction back box into wall.

SEE IMAGE #4



STEP 4:

Plug cooling system into electrical outlet.

STEP 5:

Install your plasma mounting bracket (not included).


STEP 6:

Mount plasma inside back box. SEE IMAGES #5 & 6



VisionArt®

The VisionArt Internal Cooling Solution VA-ICS
Complete with temperature sensor and power supply

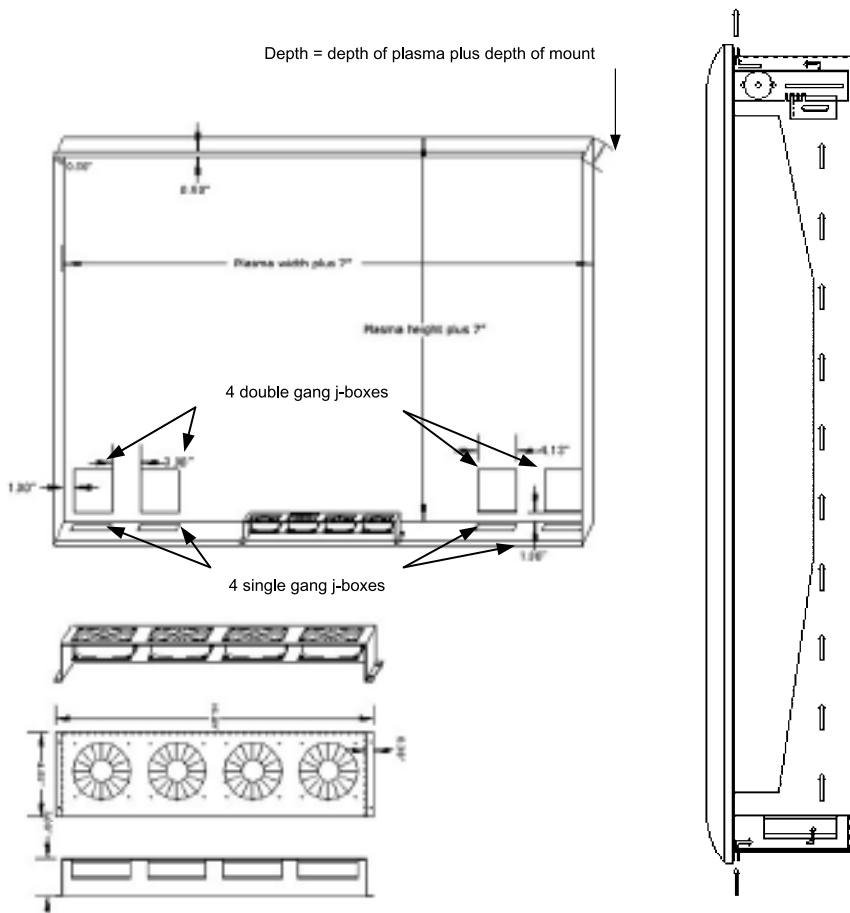

**IF YOU ALREADY HAVE YOUR VISIONART, PLEASE REFER TO
THE INSTRUCTIONS PROVIDED WITH YOUR UNIT TO
COMPLETE YOUR INSTALLATION.**

**NEED HELP?
CONTACT VISIONART CUSTOMER SERVICE
866.432.4353 X28**