

VisionArt® MOUNTING OPTIONS

Surface Mounted TV

Recess Mounted TV

DEPTH


TV depth +
TV Mounting bracket depth

TV OVERLAP

The inside of the Decorative Frame will overlap the TV by 1/4" on all sides

SIDE TREATMENTS

Black returns are included and mount on the sides to conceal the TV.

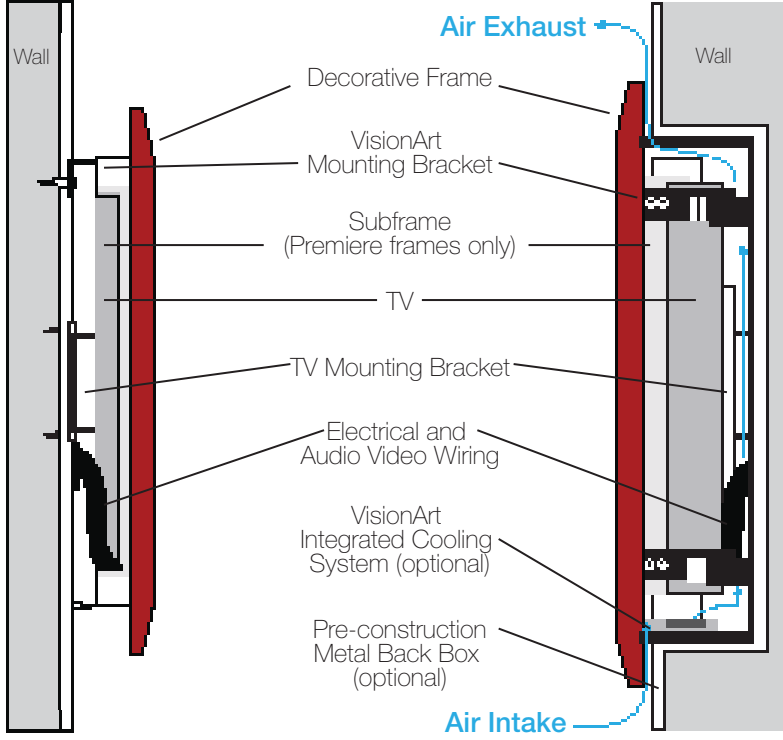

CAVITY DIMENSIONS



TV height +7"
TV width +7"
TV depth + mounting bracket depth

CAVITY OVERLAP

Frame will overlap the edge by at least 1/2". Some frames are wider and will overlap more.

TV OVERLAP

The inside of the Decorative Frame will overlap the TV by 1/4" on all sides

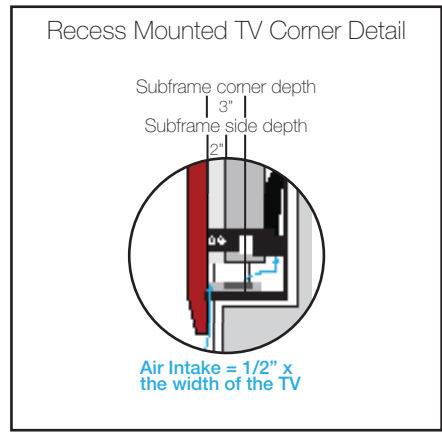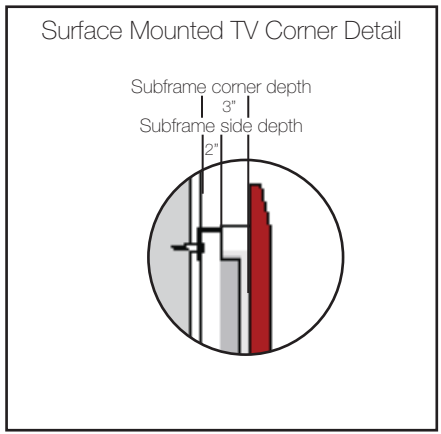

Recessed Back Box & Integrated Cooling System

A pre-construction, 16 gauge metal back box and VA-ICS (Integrated Cooling Systems) may be ordered for recess mounted flat screen television installations. A back box allows the contractor to build the TV cavity to the precise size without a CAD drawing. Every back box comes with the VisionArt mounting brackets installed and ready to accept the VisionArt. The back box top and bottom are flanged to be flush mounted against the finished wall. The sides are straight and force the VisionArt off the wall by 1/2", which closes the sides for forced airflow. The back box is painted black and creates a subtle shadow detail behind the frame. The cooling system includes four slow speed low turbulence fans with a temperature sensor that automatically turns on/off the cooling system as needed. There is a 1/2" air intake at the bottom and an exhaust vent at the top eliminating the need for external ducting. This system will move 15 cubic feet of air per minute.